

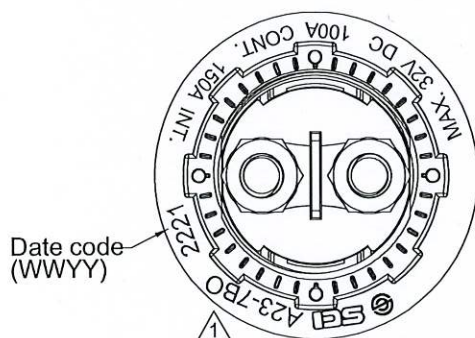


Continuous Rating	100A 32VDC Max.	Mounting Hole  Panel Thickness:11.0mm Max.	Circuit Diagram	
Intermittent Rating	150 Amps		OFF	ON
Cranking Rating	500 Amps 5 sec.			
Contact Resistance	50m ohm Max			
Insulation Resistance	DC 500V 100M ohm Min			
Dielectric Strength	AC 1000V 1 minute, DC 2000V 1 minute			
Operation Temperature	-30°C~+60°C			
Switch Function	2P SPST OFF-ON			

Actuator can be taken out

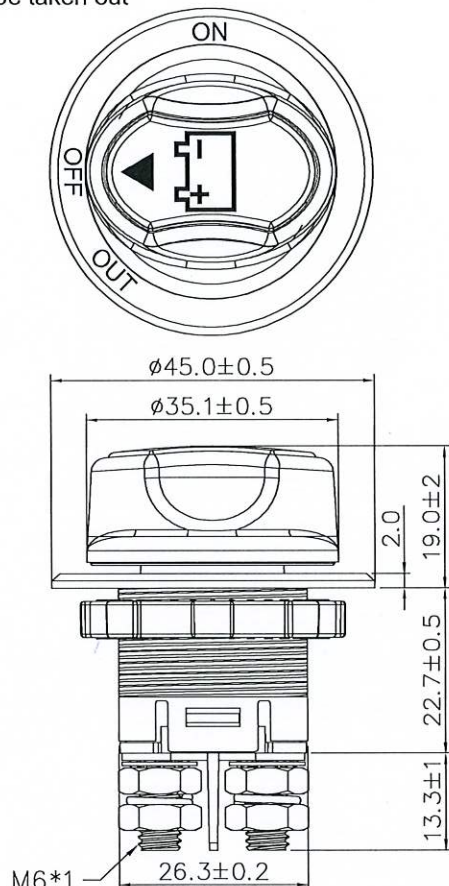


***MATERIAL:**

Housing: Black, PA#66+33%GF
with White hot stamping
Actuator: Red, PBT+15%GF
Name Plate: White, ABS
with Black hot stamping
Bottom: Black, PBT+15%GF
Nut: Black, PA#66
Bolt: Brass
Hex Nut: Ni-plated, Brass

1 NUT ASSY

*Ingress Protection: IP56 for Panel seal

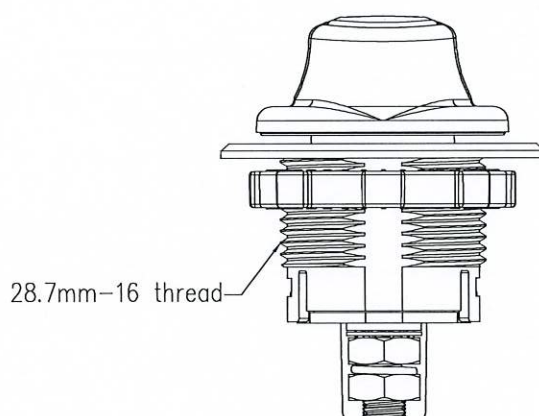

For EL014 only

tolerances Unless otherwise specified ± 0.3

									△
									△
3/25/'21	林明呈	機種標示更新，原鑄機種A23-7修改為鑄機種A23-7BO(ECR#RAD20210303-095)							△
Date	Name	Descriptions							NO
Drawn	Checked	Approved	SCI BOM No.	1340137	Model Name	BATTERY SWITCH			
林明呈	許庭碩	余啟明	Customer No.	39081	Model No.	A23-7BO			
3/25/'21	2021/04/01	2021/04/01	Unit	mm					REV. 1