


Central Article Code: C15008D01-A

Created: 01/09/2005

Local Code: 4558

Modified: 15/12/2020

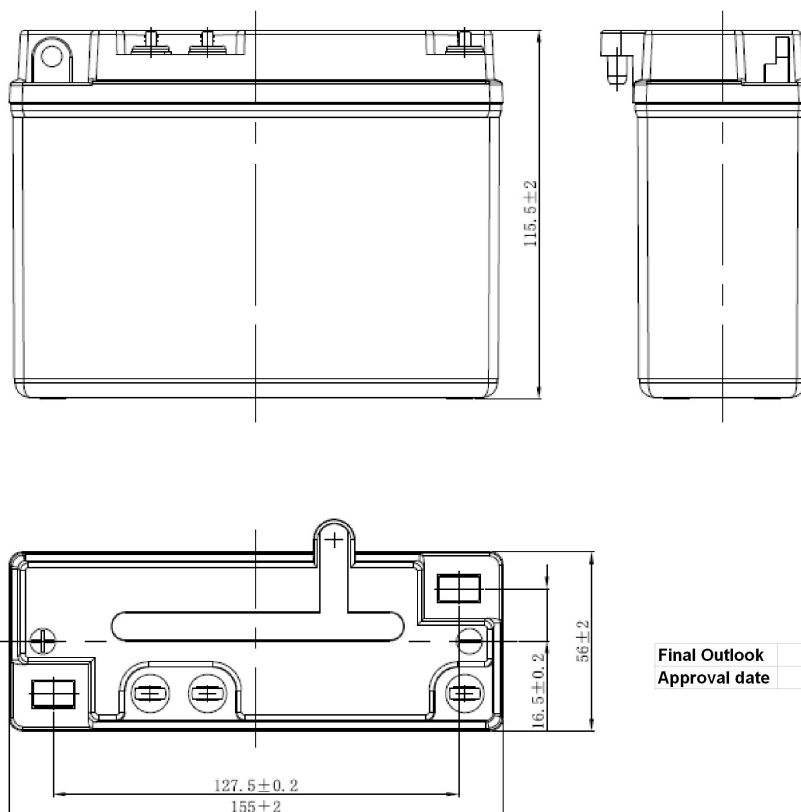

Final Outlook	C1501-A
Approval date	01/12/2009

## PERFORMANCES

Voltage (V):	6 V
C20 (Ah):	12.0      10 h
Cranking (A):	100      EN
Charge:	DRY
Technology:	Vented/Flooded
Grid:	Low Sb
Vibration:	Not Defined
Endurance:	Not Defined

## STD. DIMENSIONS

Length (mm $\pm 2$ ):	155
Width (mm $\pm 2$ ):	55
Height (mm $\pm 2$ ):	115
Total Weight (kg $\pm 5\%$ ):	2.00

This is a dry battery supplied with bottles of sulphuric acid. Sale of acid to end users is forbidden by Eu.Reg.1148/2019. Dry batteries must be filled with acid before delivery to end users

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

## CONTAINER

Type:	C15	WHITE
Hold Down:	B0	
H.D. Adapter:	No	

## COVER

Type:	Motorbike (D ventilat	BLACK
Polarity:	ETN 1	
Terminals:	M06	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Moto-D	
Filter:	No	
Lateral Plug:	No	

## PLUGS

Type:	3 x Moto Plug	RED
-------	---------------	-----

## HANDLES

Type:	None
-------	------

## OTHERS

Degassing Tube:	No
-----------------	----

EAC certified