


Central Article Code: C50009A02-A

Created: 02/09/2005

Local Code: 4923

Modified: 14/03/2019

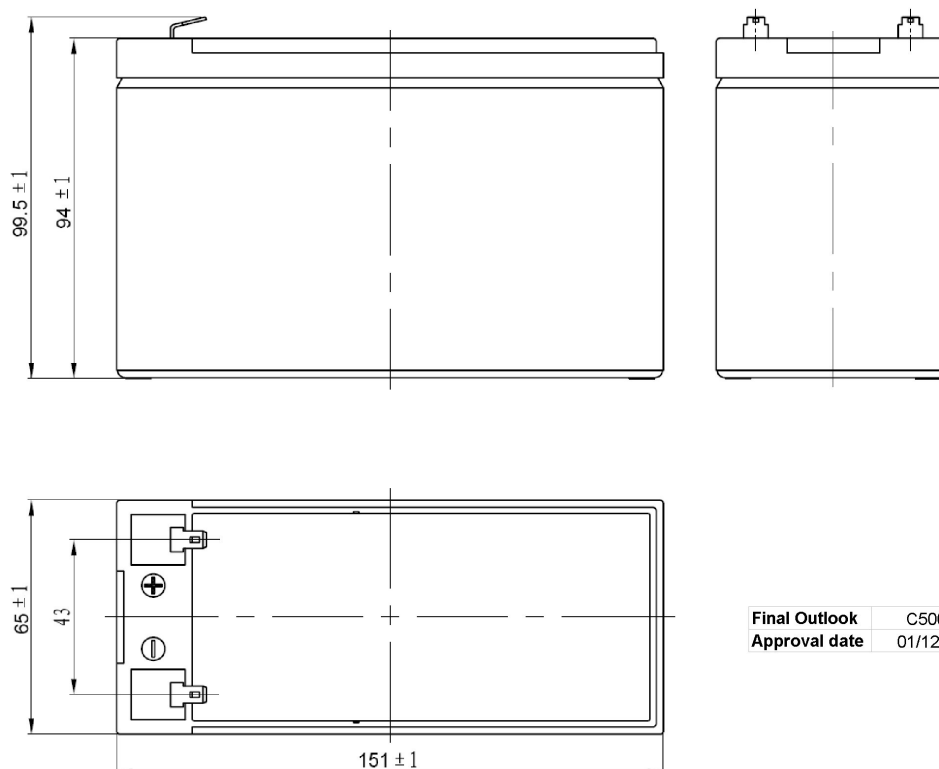

Final Outlook	C5002-A
Approval date	01/12/2011

PERFORMANCES

Voltage (V):	12 V	
C20 (Ah):	7.0	10 h
Cranking (A):	85	EN
Charge:	CHARGED	
Technology:	AGM	
Grid:	Ca/Ca	
Vibration:	Not Defined	
Endurance:	300 cycles@40%	

STD. DIMENSIONS

Length (mm ± 2):	150
Width (mm ± 2):	65
Height (mm ± 2):	95
Total Weight (kg ± 5%):	2.50

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type:	C50	BLACK
Hold Down:	B0	
H.D. Adapter:	No	

COVER

Type:	Flat/Screw	BLACK
Polarity:	ETN 3	
Terminals:	Faston S (4,8)	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Sealed	
Filter:	No	
Lateral Plug:	No	

PLUGS

Type:	6 x Valve+Cover	BLACK
-------	-----------------	-------

HANDLES

Type:	None
-------	------

OTHERS

Degassing Tube:	No
-----------------	----

EAC certified