


Central Article Code: C69030D02-A

Created: 05/09/2005

Local Code: 4934

Modified: 15/12/2020

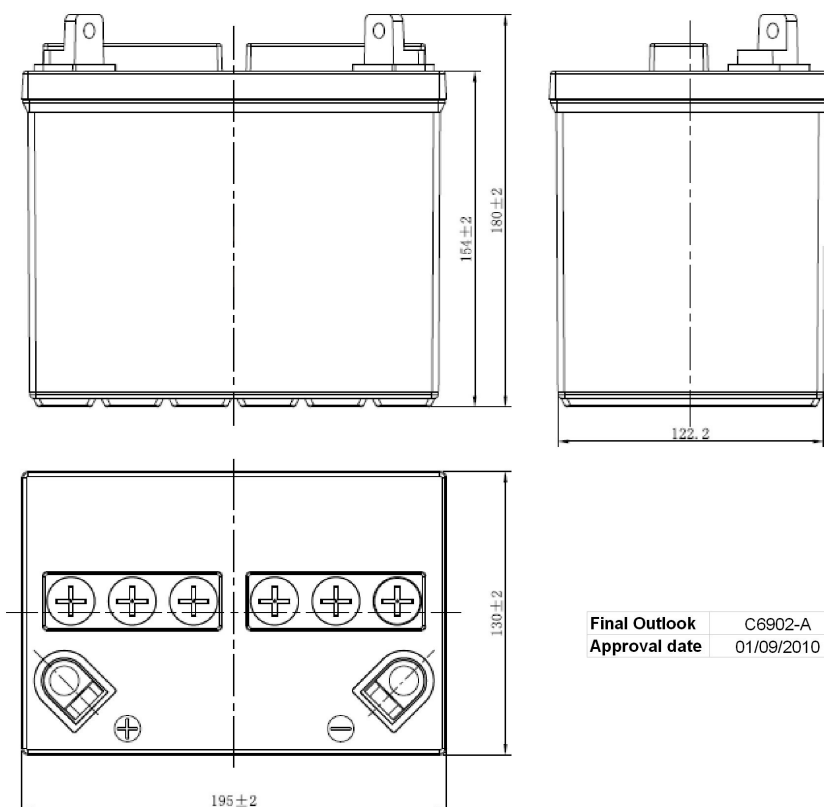

Final Outlook	C6902-A
Approval date	01/09/2010

PERFORMANCES

Voltage (V):	12 V	
C20 (Ah):	24.0	10 h
Cranking (A):	240	EN
Charge:	DRY	
Technology:	Vented/Flooded	
Grid:	Low Sb	
Vibration:	Not Defined	
Endurance:	Not Defined	

STD. DIMENSIONS

Length (mm ± 2):	195
Width (mm ± 2):	130
Height (mm ± 2):	180
Total Weight (kg ± 5%):	8.30

This is a dry battery supplied with bottles of sulphuric acid. Sale of acid to end users is forbidden by Eu.Reg.1148/2019. Dry batteries must be filled with acid before delivery to end users

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type:	C69	WHITE
Hold Down:	B0	
H.D. Adapter:	No	

COVER

Type:	Motorbike (independ	BLACK
Polarity:	ETN 1	
Terminals:	M11	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Independent	
Filter:	No	
Lateral Plug:	No	

PLUGS

Type:	6 x Moto Plug	RED
-------	---------------	-----

HANDLES

Type:	None
-------	------

OTHERS

Degassing Tube:	No
-----------------	----

EAC certified