



BLUE DYNAMIC

Key benefits



Engineered to the highest German standards



Patented PowerFrame® grid for reliable starting power, fast recharge and corrosion resistance



Meets all original criteria of the car manufacturer

- For all cars with standard equipment
- Up to 25% higher starting power than Black

For more information visit www.varta-automotive.com




ORDER INFORMATION

European Type No. (ETN):	560 409 054
Article Number:	560 409 054 313 2
Short Code:	D59
Barcode:	4016987119525
UK Code:	075
Packaging Unit:	1
Quantity per Pallet:	63

TECHNICAL INFORMATION

Voltage [V]:	12	Base Hold-down:	B13
Battery Capacity [Ah]:	60	Layout:	0
Cold Cranking Amps (CCA), EN [A]:	540	Terminal Types:	1
Length [mm]:	242	Case Size:	T5/LBN2
Width [mm]:	175	Weight filled (kg):	13,89
Height [mm]:	175		

DRAWINGS



POWERFRAME® - TECHNOLOGY



Structurally strong


Built for strength, PowerFrame patented grid technology is up to 66% more durable and more corrosion resistant than other grid designs.

Patterned for power

The PowerFrame grid design provides superior cranking power with up to 70% better electrical flow than other grid technologies.

Clean construction

The PowerFrame grid design provides superior cranking power with up to 70% better electrical flow than other grid technologies.

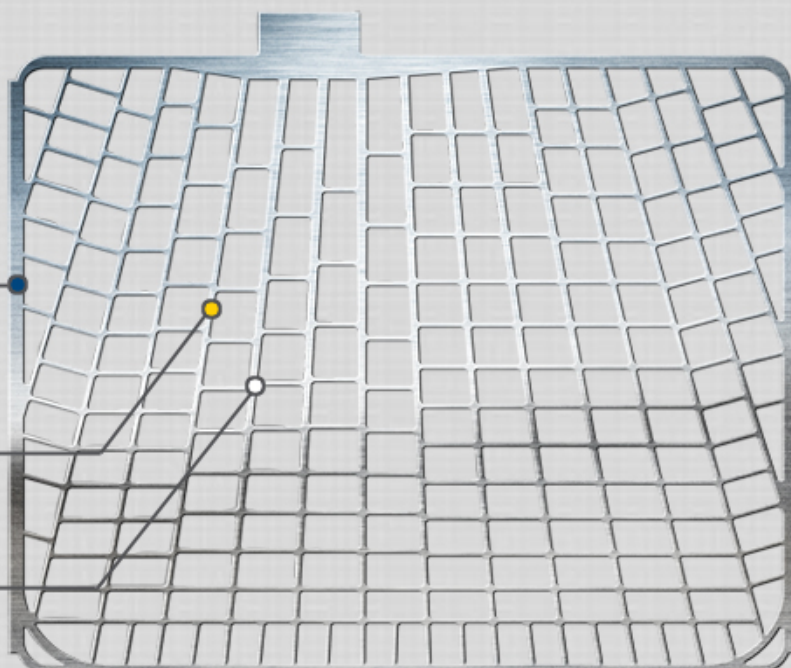

	<i>SILVER Dynamic</i>	<i>BLUE Dynamic</i>	<i>BLACK Dynamic</i>
Number of battery types	11 types	25 types	13 types
Primary function	Engine start	Engine start	Engine start
Cold cranking power	CCA 122%*	CCA 110%*	CCA 100%*
Battery technology	Flooded/SLI*	Flooded/SLI	Flooded/SLI
Positive grid/ Negative grid	PowerFrame® / Expanded	PowerFrame® / Expanded	PowerFrame® / Expanded
OE quality	Exceeds OE requirements	Meets original equipment	Meets original equipment

*Compared to conventional batteries