

Prima


APBX 10 AS₂

Active Saled Sub Box
800 W



TECHNICAL SPECIFICATIONS		
Component		Active Sub Box
Subwoofer size	mm (in.)	250 (10)
Power Handling	W peak W continuous	800 400
Impedance	Ω	0,16
Sub box size	mm (in.)	440 (17.32) x 158 (6.22) x 334 (13.15)
Weight of one component	kg (lb.)	9,4 (29.72)
Magnet		High density flux ferrite
Cone		Water-repellent pressed paper
Subwoofer Voice coil Ø	mm (in.)	60 (2.36)

- 1 Integrated 400 W RMS @ 0.16 Ω D-Class amplifier featuring he-li technology (high efficiency / low impedance) without switching power supply, for a performance next to ideal.
- 2 Input stage DBT (Dynamic Bass Tracking) technology allows 100% use of the he-li (High Efficiency Low Impedance) amplifier power and to enjoy a tense and dynamic bass even at very high listening volumes.
- 3 Butterworth low-pass filter at 12dB/Oct. with variable cutting frequency (50-300 Hz), phase control (0 - 180°) and adjustable bass-boost 0÷6 db @ 45Hz.
- 4 Defeatable filter to use the sub dedicated output of a bit or AP bit processor.
- 5 High level audio input on multi-pin connector for maximum OEM integration and low level on RCA for aftermarket sources.
- 6 ART turn on function (Automatic Remote Turn-On) selectable among: Remote-in, Hi-level, Audio signal.
- 7 Box with ultra-low profile (6.22 in. / 158 mm) in air suspension, designed to take full advantage of the performance of the 10-inch APS 10 DL high-impedance driver.
- 8 The SSP (Sub Smart Plug) terminal block is provided with a Plug&Play connector to be able to disconnect the box easily and safely.
- 9 The 2S² (2 Sides / 2 Sounds) design provides the ability to select between Down-Firing positioning to increase the low frequency extension and Up-Firing install to obtain more punch and definition.
- 10 Down-firing levelling feet with Velcro inserts included for a secure grip with the carpet, ensuring extreme ease of removal.
- 11 Rounded corners allow easy placement in the trunk and act as a reinforcement to reduce enclosure resonances.
- 12 Exclusive design of the cone, dust-cap and basket geometry to achieve a wide linear excursion (9 mm in one direction), keeping the depth required for assembly to a minimum.
- 13 HRC AP remote control included.
- 14 Sturdy metal grille included, for a total protection of the subwoofer driver.

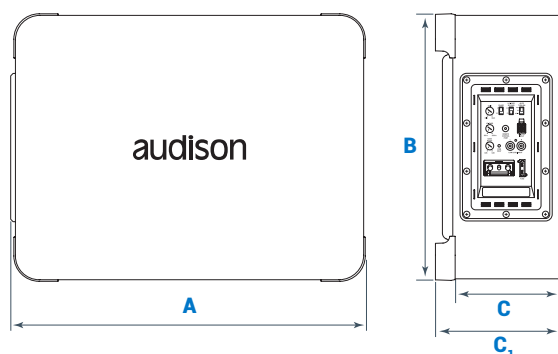


A	B	C	C ₁
440 mm 17.32 in.	334 mm 13.15 in.	135 mm 5.31 in.	158 mm 6.22 in.

From R&D to
final product
KLIPPEL
since 2005


dbt
Dynamic Bass
Tracking

he·li
High Efficiency -
Low Impedance

SSP
Sub Smart Plug



PLUG-&PLAY

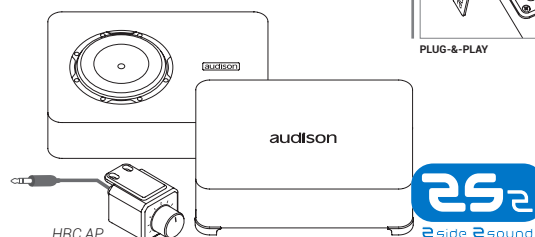

HRC AP

2S₂
2 side 2 sound

Technology Art Sound
Manufactured by
elettromedia

Elettromedia
62018 Potenza Picena (MC) Italy
T +39 0733 870 870 - F +39 0733 870 880
elettromedia.com

audison