
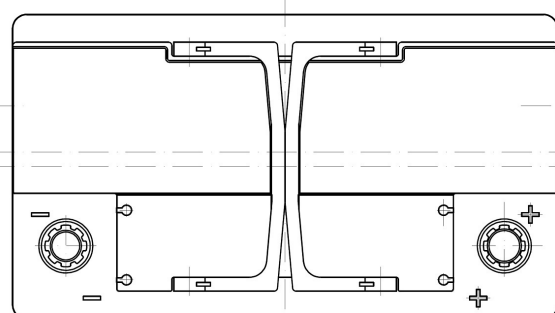
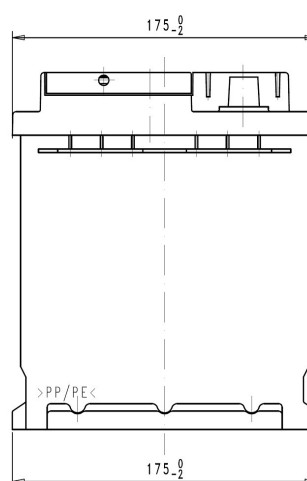


Central Article Code: LH4085C16-B

Created: 24/02/2020

Local Code: EA1050

Modified: 23/02/2021

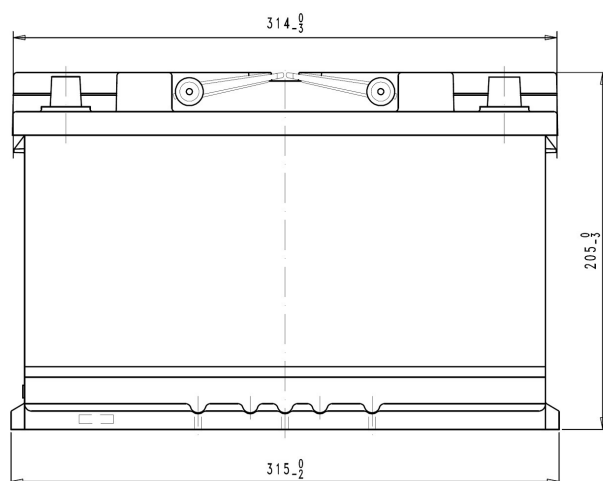

Final Outlook	LH416-B
Approval date	01/02/2021

PERFORMANCES

Voltage (V):	12 V
C20 (Ah):	105.0 20 h
Cranking (A):	850 EN
Charge:	WET
Technology:	Vented/Flooded
Grid:	Ca/Ca
Vibration:	V1 (30Hz+/-2Hz/3g/2h)
Endurance:	E1 (180 cycles@25%)

STD. DIMENSIONS

Length (mm ± 2):	315
Width (mm ± 2):	175
Height (mm ± 2):	205
Total Weight (kg ± 5%):	23.10

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type:	LH4	BLACK
Hold Down:	B13	
H.D. Adapter:	No	

COVER

Type:	Double with Integrat	BLACK
Polarity:	ETN 0	
Terminals:	EN taper post	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Central	
Filter:	2 Filters	
Lateral Plug:	Standard shape	Left side BLACK

PLUGS

Type:	1 x Vent Sealed PSL-OE ha	BLACK
-------	---------------------------	-------

HANDLES

Type:	2 x PSL OE Integrated	BLACK
-------	-----------------------	-------

OTHERS

Degassing Tube:	No
-----------------	----

C.O. from LH4085C01-C (PSL-AM to PSL-OE)