
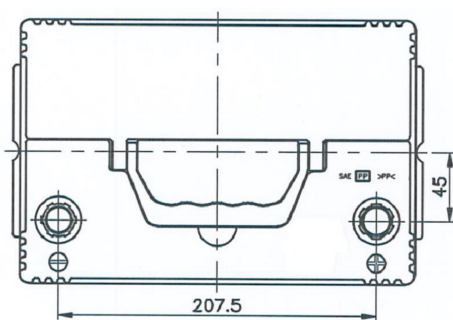
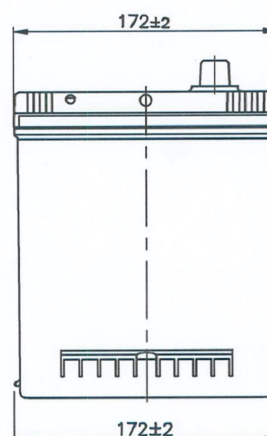


Central Article Code: D26063C03-A

Created: 11/11/2013

ETN Code or Other:

Modified: 30/01/2015

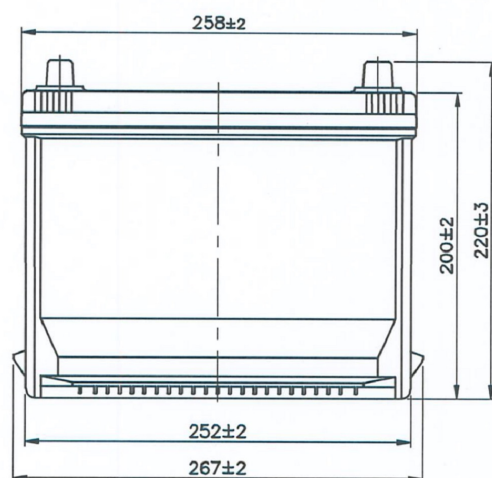

Final Outlook	D2603-A
Approval date	15/12/2013

PERFORMANCES

Voltage (V):	12 V
C20 (Ah):	75.0 20 h
Rc (min):	0
Cranking (A):	630 EN
Vibration:	V1 (35Hz/3g/2h)
Endurance:	E1 (180 cycles@25%)
Charge:	WET
Technology:	Vented/Flooded
Grid:	Ca/Ca

WEIGHT AND STD. DIMENSIONS

Lead Weight (kg ± 5%):	10.3
Battery Weight (kg ± 5%):	18.6
Volume acid (l ± 5%):	4.9
Length (mm ± 2):	270
Width (mm ± 2):	173
Height (mm ± 2):	222

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type:	D26 GREY DARK
Hold Down:	Korean B1+B6
H.D. Adapter:	No

COVER

Type:	Double with IntegGREY DARK
Polarity:	ETN 0
Terminals:	EN taper post
Terminal Adapter:	No
SOCI:	No
Ventilation:	Central
Filter:	2 Filters
Lateral Plug:	No

PLUGS

Type:	1 x Vent Sealed (JIS) GREY DARK
-------	---------------------------------

HANDLES

Type:	1 x Integrated GREY DARK
-------	--------------------------

OTHERS

Degassing Tube:	No
-----------------	----