
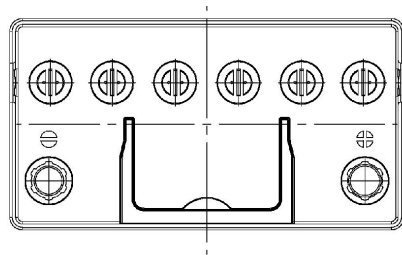
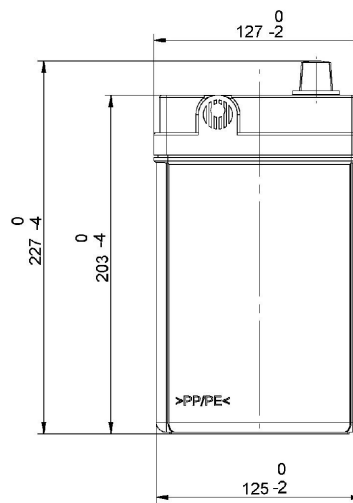


Central Article Code: B24033C05-A

Created: 04/11/2013

Local Code: EB454

Modified: 26/02/2015

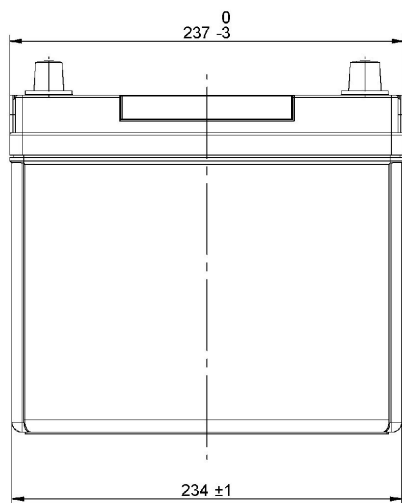

Final Outlook	B2405-A
Approval date	15/02/2014

## PERFORMANCES

Voltage (V):	12 V	
C20 (Ah):	45.0	20 h
Cranking (A):	330	EN
Charge:	WET	
Technology:	Vented/Flooded	
Grid:	Ca/Ca	
Vibration:	V1 (35Hz/3g/2h)	
Endurance:	E1 (180 cycles@25%)	

## STD. DIMENSIONS

Length (mm ± 2):	237
Width (mm ± 2):	127
Height (mm ± 2):	227
Total Weight (kg ± 5%):	11.40

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

## CONTAINER

Type:	B24	BLACK
Hold Down:	B0	
H.D. Adapter:	No	

## COVER

Type:	Flat/Screw Integ GREY DARK
Polarity:	ETN 0
Terminals:	EN taper post
Terminal Adapter:	No
SOCI:	No
Ventilation:	Independent
Filter:	No
Lateral Plug:	No

## PLUGS

Type:	6 x M18	GREY DARK
-------	---------	-----------

## HANDLES

Type:	1 x Integrated	GREY DARK
-------	----------------	-----------

## OTHERS

Degassing Tube:	No
-----------------	----