


CUSTOMER DATASHEET


Printed: 30/10/2019

Product Management Transportation Europe

D03085C10-A Created: 16/05/2012 Central Article Code:

Modified: 20/12/2018 Local Code: EF1420

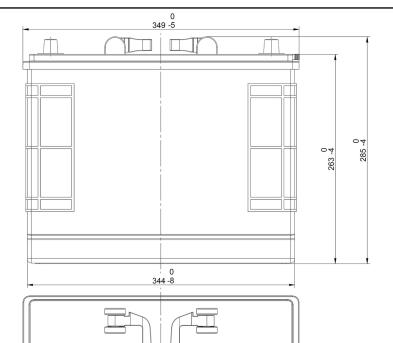



Final Outlook Approval date

D0310-A 01/05/2014

PERFORMANCES

12 V Voltage (V):

C20 (Ah): 142.0 20 h 850 ΕN Cranking (A):

WET Charge:

Vented/Flooded Technology:

Grid: Ca/Ca

Vibration: V2+ (30Hz+/-2Hz/6g/10h)

Endurance: E2+ (110 cycles@50%)

CONTAINER

D03 **GREY MEDIUM** Type:

B0 Hold Down: H.D. Adapter: No

COVER

GREY MEDIUM Type: Flat/Press

Polarity: ETN 0

Terminals: EN taper post

Terminal Adapter: No SOCI: No Ventilation: Central

Filter: 1 Filter at Right

Lateral Plug: No

STD. DIMENSIONS

Length (mm ± 2): 349 Width $(mm \pm 2)$: 175 Height (mm ± 2): 285 Total Weight (kg ± 5%): 35.10

1 x VCL Vent Type:

GREY MEDIUM

HANDLES

PLUGS

2 x Rigid **BLACK** Type:

OTHERS

Degassing Tube: No

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

This document includes confidential data, is not contractual and could be changed without notice. Any use, copy or distribution has to be authorised in writing by EXIDE Technologies.