


## **CUSTOMER DATASHEET**


Printed: 17/02/2022

Product Management
Transportation Europe

Central Article Code: D03085C11-A Created: 16/05/2012

Local Code: EF1421 Modified: 31/07/2020

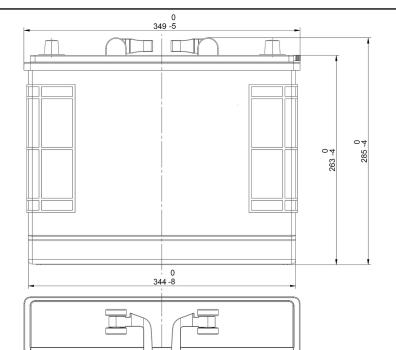



Final Outlook Approval date

D0311-A 01/05/2014

## **PERFORMANCES**

Voltage (V): 12 V

C20 (Ah): 142.0 20 h Cranking (A): 850 EN

Charge: WET

Technology: Vented/Flooded

Grid: Ca/Ca

Vibration: V2+ (30Hz+/-2Hz/6g/10h)

Endurance: E2+ (110 cycles@50%)

## \_\_\_\_\_

No

Type: D03 GREY MEDIUM Hold Down: B0

COVER

H.D. Adapter:

Type: Flat/Press GREY MEDIUM

CONTAINER

Polarity: ETN 1

Terminals: EN taper post

Terminal Adapter: No SOCI: No Ventilation: Central

Filter: 1 Filter at Right

Lateral Plug: No

## **STD. DIMENSIONS**

 Length (mm  $\pm$  2):
 349

 Width (mm  $\pm$  2):
 175

 Height (mm  $\pm$  2):
 285

 Total Weight (kg  $\pm$  5%):
 35.10

PLUGS

Type: 1 x VCL Vent GREY MEDIUM

**HANDLES** 

Type: 2 x Rigid BLACK

OTHERS

Degassing Tube: No

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

This document includes confidential data, is not contractual and could be changed without notice. Any use, copy or distribution has to be authorised in writing by EXIDE Technologies.