


Central Article Code: G31100C10-A



Created: 12/06/2012

Local Code: EG110B

Modified: 27/01/2017

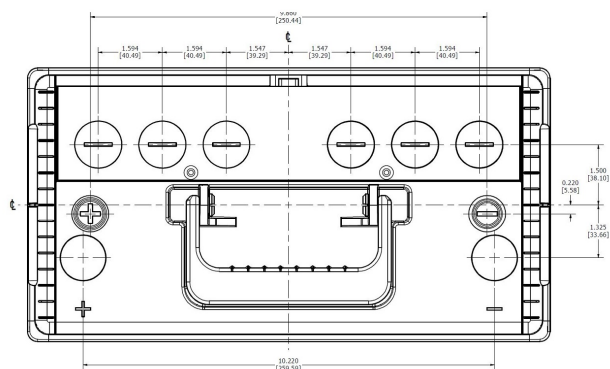

Final Outlook	G3110-A
Approval date	01/07/2016

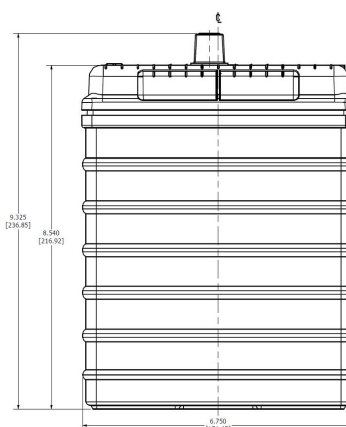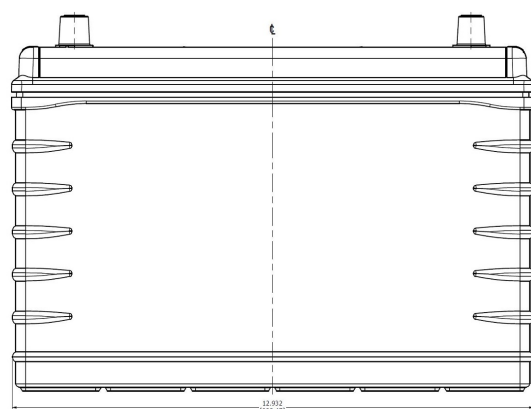

PERFORMANCES

Voltage (V):	12 V	
C20 (Ah):	110.0	20 h
Cranking (A):	1000	SAE 7.2 v 30 Sec.
Charge:	WET	
Technology:	Vented/Flooded	
Grid:	Ca/Ca	
Vibration:	V2 (30Hz+/-2Hz/6g/2h)	
Endurance:	E2 (90 cycles@50%)	

STD. DIMENSIONS

Length (mm ± 2):	330
Width (mm ± 2):	173
Height (mm ± 2):	240
Total Weight (kg ± 5%):	27.40

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type:	G31	BLACK
Hold Down:	B0	
H.D. Adapter:	No	

COVER

Type:	Flat/Press integ	BLACK
Polarity:	ETN 9	
Terminals:	SAE A taper post	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Central	
Filter:	No	
Lateral Plug:	No	

PLUGS

Type:	2 x Vent	BLACK
-------	----------	-------

HANDLES

Type:	1 x Rigid	BLACK
-------	-----------	-------

OTHERS

Degassing Tube:	No
-----------------	----