


## TECHNICAL DATASHEET


Printed: 14/06/2011 **Product Management** 


Transportation Europe

Central Article Code: G31072A08-A 08/06/2010 Created: ETN Code or Other: 31M700BXLW Modified: 21/09/2010

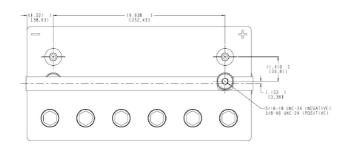

**Final Outlook** G3108-A Approval date 15/06/2010





	PERFORI	MANCES		
Voltage (V):	12 V			
C20 (Ah):	100.0	20 h		
Rc (min):	200			
Cranking (A):	720	EN		
Vibration:	V3 (35Hz/6	V3 (35Hz/6g/20h)		
Endurance:	500 cycles	500 cycles@75%		
Charge:	CHARGED			
Technology:	AGM			
Grid:	Ca/Ca			
WEIG	HT AND ST	D. DIMENSIONS		
	-	-		

DEDECOMANCES

Battery Weight (kg): 31.84 Volume acid (I): 0.00 Length (mm): 330 Width (mm): 173 Height (mm): 240

**CONTAINER** G31 **BLACK** Type: Hold Down: B0 H. D. Adapter: No **COVER** 

Flat/Press **BLUE LIGHT** Type: Polarity: ETN 1

Terminals: SAE M 3/8"- 5/16" taper&stud

Terminal Adapter: No SOCI: No

Ventilation: Independent

Filter: No No Lateral Plug:

**PLUGS** 6 x M18 Valve **GREY MEDIUM** Type: **HANDLES** 

**BLACK** Type: 1 x Strip

**OTHERS** Degassing Tube:

No

3/8-5/16 nuts in plastic bag