
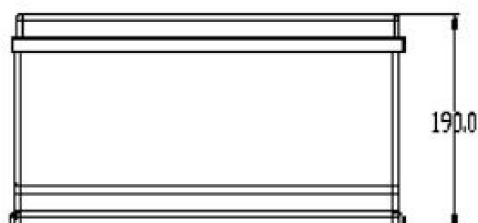



Central Article Code: L05015L33-A

Created: 07/07/2021

Local Code: EV1250

Modified: 26/08/2021

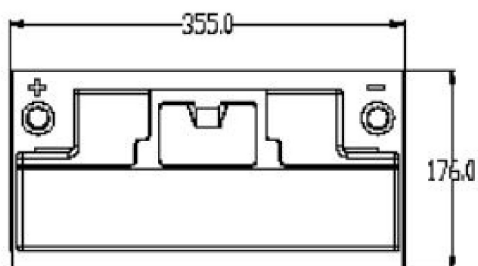

Final Outlook	L0533-A
Approval date	01/12/2021

PERFORMANCES

Voltage (V):	12 V
C20 (Ah):	96.0 03 h
Cranking (A):	0 3s @ 25° test
Charge:	CHARGED
Technology:	Li-ion
Grid:	LiFePO4
Vibration:	3 axis acc. UN38.3 req.
Endurance:	4000c at 80% DoD

STD. DIMENSIONS

Length (mm ± 2):	353
Width (mm ± 2):	175
Height (mm ± 2):	190
Total Weight (kg ± 5%):	10.70

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type:	L05 BLACK
Hold Down:	B13
H.D. Adapter:	No

COVER

Type:	Double with Integrat BLACK
Polarity:	ETN 0
Terminals:	EN taper post
Terminal Adapter:	No
SOCI:	No
Ventilation:	Central
Filter:	No
Lateral Plug:	No

PLUGS

Type:	1 x Not defined BLACK
-------	-----------------------

HANDLES

Type:	1 x Integrated BLACK
-------	----------------------

OTHERS

Degassing Tube:	No
-----------------	----

TB-BL1296F S110