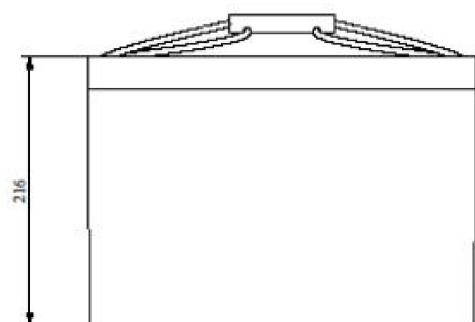| Central Article Code:	G77017L01-A		Created:	07/07/2021
Local Code:	EV1300/24		Modified:	29/11/2021
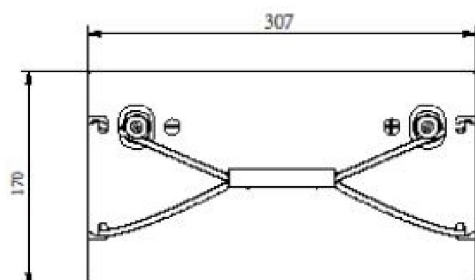
Final Outlook	G7701-A
Approval date	01/12/2021

PERFORMANCES

Voltage (V):	24 V	
C20 (Ah):	50.0	03 h
Cranking (A):	0	3s @ 25º test
Charge:	CHARGED	
Technology:	Li-ion	
Grid:	LiFePO4	
Vibration:	3 axis acc. UN38.3 req.	
Endurance:	4000c at 80% DoD	

STD. DIMENSIONS

Length (mm ± 2):	307
Width (mm ± 2):	170
Height (mm ± 2):	215
Total Weight (kg ± 5%):	15.00

CONTAINER

Type:	G77	BLACK
Hold Down:	B0	
H.D. Adapter:	No	

COVER

Type:	Flat/Press	BLACK
Polarity:	ETN 1	
Terminals:	M08	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Central	
Filter:	No	
Lateral Plug:	No	

PLUGS

Type:	1 x Not defined	BLACK

HANDLES

Type:	1 x Rope (Rigid holder)	BLACK

OTHERS

Degassing Tube:	No

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

TB-BL2450F-S110A