


Central Article Code: H52030L03-A

Created: 07/07/2021

Local Code: EV3800/36

Modified: 26/08/2021

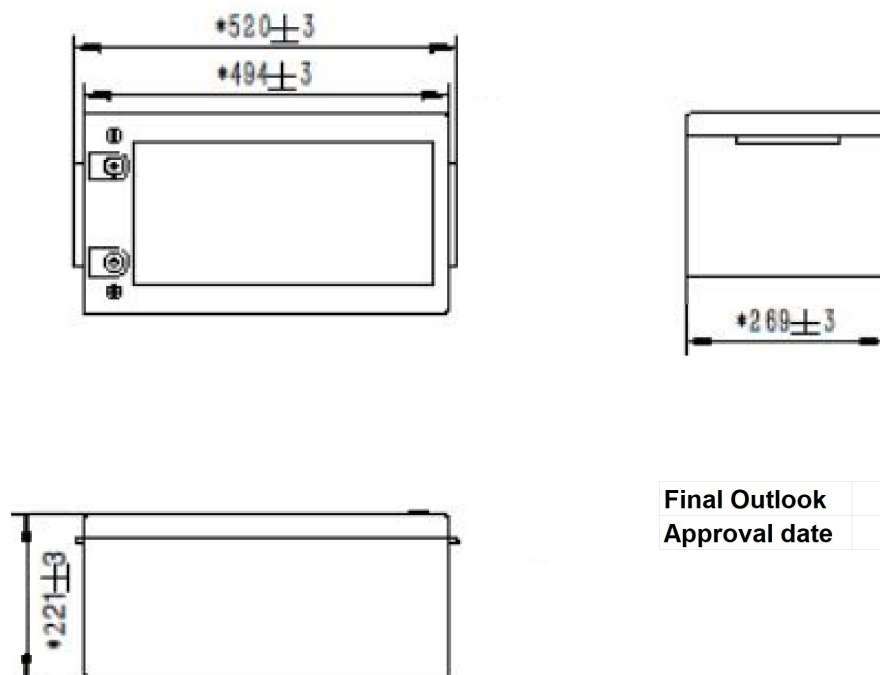

Final Outlook	H5203-A
Approval date	01/12/2021

PERFORMANCES

Voltage (V):	36 V
C20 (Ah):	100.0 03 h
Cranking (A):	0 3s @ 25° test
Charge:	CHARGED
Technology:	Li-ion
Grid:	LiFePO4
Vibration:	3 axis acc. UN38.3 req.
Endurance:	4000c at 80% DoD

STD. DIMENSIONS

Length (mm ± 2):	520
Width (mm ± 2):	269
Height (mm ± 2):	221
Total Weight (kg ± 5%):	39.00

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type:	H52	BLACK
Hold Down:	B0	
H.D. Adapter:	No	

COVER

Type:	Flat/Press	BLACK
Polarity:	ETN 4	
Terminals:	M08	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Central	
Filter:	No	
Lateral Plug:	No	

PLUGS

Type:	1 x Not defined	BLACK
-------	-----------------	-------

HANDLES

Type:	2 x Rope	BLACK
-------	----------	-------

OTHERS

Degassing Tube:	No
-----------------	----

TB-BL36100F-S110A