

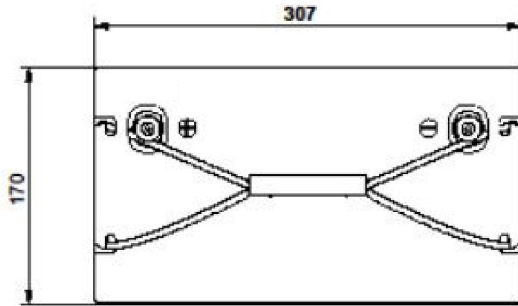


Central Article Code: D31005L46-A
 Local Code: EV640

Created: 26/08/2021
 Modified: 26/08/2021

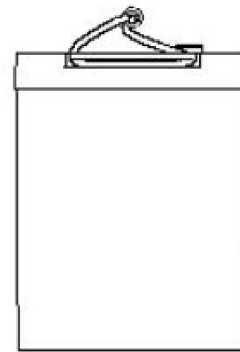

Final Outlook	D3146-A
Approval date	01/12/2021

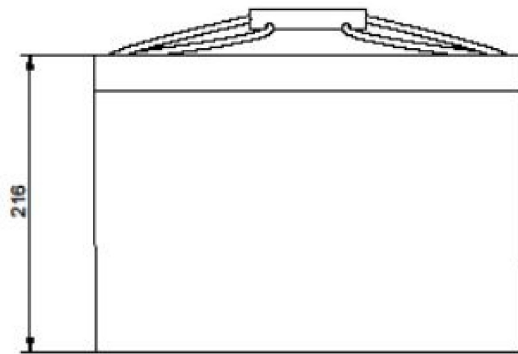

PERFORMANCES

Voltage (V):	12 V	
C20 (Ah):	50.0	03 h
Cranking (A):	0	3s @ 25° test
Charge:	CHARGED	
Technology:	Li-ion	
Grid:	LiFePO4	
Vibration:	3 axis acc. UN38.3 req.	
Endurance:	4000c at 80% DoD	

CONTAINER

Type:	D31	BLACK
Hold Down:	B0	
H.D. Adapter:	No	

COVER

Type:	Flat/Press	BLACK
Polarity:	ETN 0	
Terminals:	M08	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Central	
Filter:	No	
Lateral Plug:	No	

STD. DIMENSIONS

Length (mm ± 2):	306
Width (mm ± 2):	173
Height (mm ± 2):	222
Total Weight (kg ± 5%):	6.50

PLUGS

Type:	1 x Not defined	BLACK
-------	-----------------	-------

HANDLES

Type:	1 x Rope (Rigid holder)	BLACK
-------	-------------------------	-------

OTHERS

Degassing Tube:	No
-----------------	----

TB-BL1250F S110A

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.