

## Product List



①	3.54-inch Dash Mini Display	⑤	AMD harness
②	pry bar	⑥	screen power connector
③	gasket and screw	⑦	
④	Intel harness	⑧	

### 1. Tools required for installation

pry tool and Phillips screwdriver

### 2. Installation precautions

**Verify the version and power off the screen before installation**

Note: To expedite the installation process, please carefully read this instruction manual.

# Inspection Before And After Installation

## NOTE

1. Before installation, please check if the product list is complete and free of damage.
2. The installation instructions may differ slightly from actual operation. If there are any discrepancies, please refer to the actual situation or contact us.
3. Warning: Do not disassemble any components on your own. Any improper operations are not covered under warranty.
4. Please confirm the version information and turn off the vehicle power before installing the product.
5. Please watch the installation video and instruction manual before installing the product.
6. Before turning on the product after installation, please confirm that the installation and wiring are correct.
7. Check if the installed product functions properly. If there are any issues, please check if the plug is securely inserted.
8. Check if the original vehicle functions are working properly. If there are any issues, please check if the plug is securely inserted.
9. Please do not install the product if you receive a damaged item. Please take photos immediately and provide them to our after-sales team for confirmation. Photos should be provided that include all parts of the product and can display the damage. (If the product is notified of the damage after installation, claims and reissues will not be accepted, and you will need to purchase the parts again at your own expense.)



**installation manual**




**tutorial video**

### **Aftersale Contact**

**Phone/whatsapp: +86 130 4421 9654  
+1-949 3584 793**

**Email: [support@hansshow.com](mailto:support@hansshow.com)**

## Installation Steps

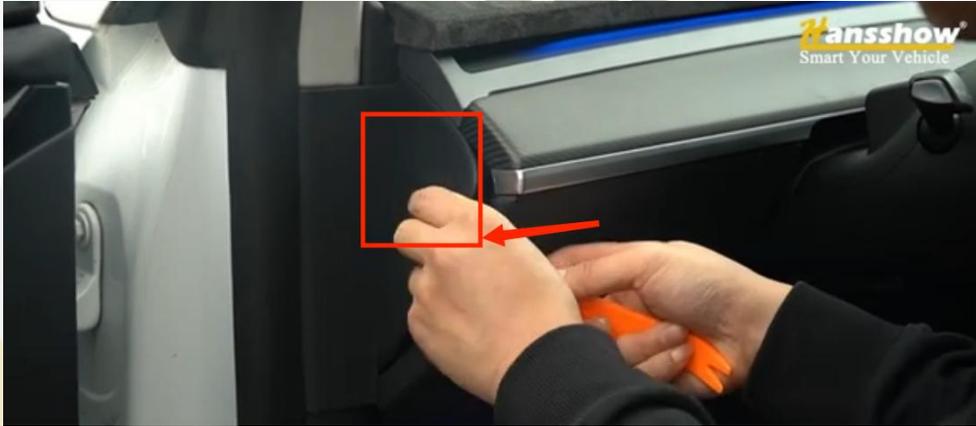

1. Use a pry bar to pry open the left and right small side panels.



2. Use a pry bar to pry open the middle trim panel

## Installation Steps



3. Use a pry bar to pry open this side trim panel



4. Pry open this trim panel after opening one round buckle.

## Installation Steps



5. Thread the wires of the mini display through the metal gasket and fix it in place with a screw.



6. Fix the mini display with its snap-in clip.

## Installation Steps




7. Remove the footwell panel on the passenger side


**Intel version:**

8. Locate the second gray plug on top of the host above the passenger's footwell, and connect the adapter plug.

# Installation Steps

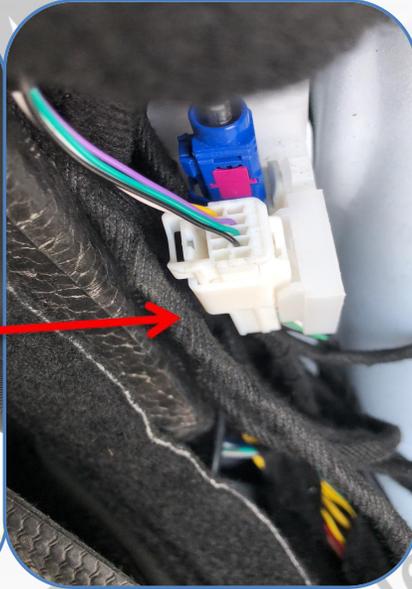

Model Y

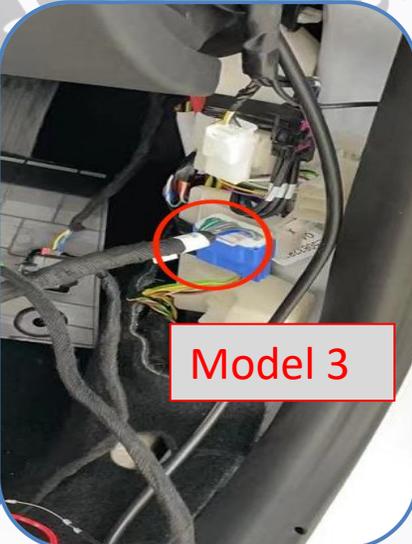


Model 3

## AMD version:

1. Connect the plug to the white plug under the A-pillar of the right front seat.
2. Connect the plug to the blue plug located under the A-pillar of the right front seat.

## Installation Steps

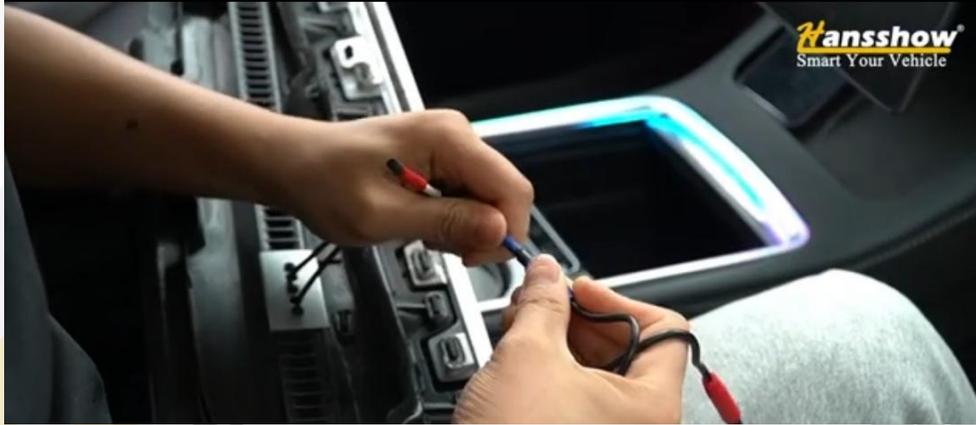

9. Connect the red and blue wires together.



10. Run the wire harness along the center console, being careful not to let it be compressed by any clips, and try to make it as tidy as possible (you can use vinegar adhesive tape to fix it firmly). Finally, restore the center console and other panels to complete the installation.

# Installation Steps



For Model 3/Y

3.54" HD 2.5D Screen

Sync display of original driving information

High-performance operating system

Control from original steering wheel buttons

High-brightness Irregular Vehicle-specific Screen

Multiple ambient color adjustments

# Frequently Asked Questions and Solutions

Fault	Reason	Solution
Black screen (installed but not turning on)	Blown power supply fuse	Replace the same model fuse
	Abnormal microprocessor operation caused by other factors	Restart key
	If the main plug is disconnected and not reconnected within 5 minutes	Connect the wiring harness, lock the car for 2 hours, keep the mobile phone and remote key within a distance of more than 20 meters from the car, and check if the screen can light up after 2 hours.
	The host or screen plug is not securely plugged in	Reconnect the host plug
No display during startup	Background data error	Reconnect the host plug
Original car information not displayed or not synchronized	The power protocol cable is not working	Reconnect the cable and check the wire interface