











www.nordrive.it





Foot kits for vehicles with built-in fix points


The foot kits use the vehicle's own fix points. Each fitting base lays on a solid custom-shaped pad. Easy to install, all the feet are equipped with safety locks.











- Never exceed the maximum load indicated in the assembly instructions. This limit is however subject to the maximum load illustrated in the vehicle user and maintenance manual. Always follow instructions for the lowest maximum load.
- · Maximum load is intended as: bar weight + weight of any applicable accessories + weight of the load





Foot kit for vehicles with rain gutters

Suitable for Kargo and Kargo-Plus bars.



Each kit contains two feet for the mounting of one single bar.














N30310 H = 16-21 cm GSTÜV N30315 H = 22-37 cm GSTÜV

N30320 H = 43-58 cm









Box 🗇 4/12



LOAD STOPS K-2 (PAIR)

Easy to move along the bar and adjust according to the load. Keep the bulky load firmly in place and prevent it from sliding.

N11002 K-2 23 cm

Box 🗇 4/8

E



SCREW FIXED MOUNTING Perfect when the transported cargo is always the same or has the same width.




MANUAL KNOBS FIXING Ideal when the transported cargo often varies in width or when it must be adjusted after loading.







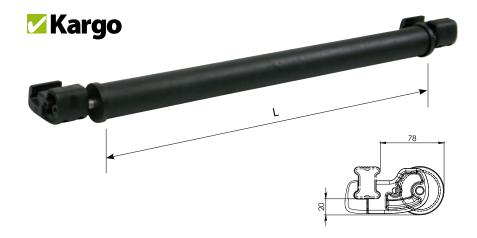

KARGO ROLLER

Metal core with plastic sheath.
Makes it easy to load and unload long objects from the rear of the vehicle.

N11000 K-0 L = 64 cm **N11003 K-7** L = 96 cm

Box 🗇 4/8













KARGO-TUBE

Ideal for transporting pipes, umbrellas, canopies, rolls, rods, Ideal for transporting pipes, umbrellas, canopies, rous, posts and other long objects. Single piece extrusion, thick impact resistant PP tube with heat sealed waterproof end cap. The inner part of the tube is seamless, completely smooth, no joints, no hems to avoid damages, scratches and to facilitate the loading and unloading. The round shape ensures stability of the content and prevents the crashing against the sides while

Closure cap with bayonet safety catch and integrated lock.
Included accessories:

Lock with 3 keys.

Inner load extractor with steel cable puller.

2 or 3 stainless steel fitting brackets suitable for installation on

- traditional roof bars and on aluminium bars with integrated "T" connector railing

N11050	T200	L = 205 cm (2 brackets)
N11051	T300	L = 305 cm (3 brackets)
N11052	T400	L = 405 cm (3 brackets)

Box 🗇 1







Additional brakets may be ordered separately (art. N99975)



Inner load extractor with steel cable puller.



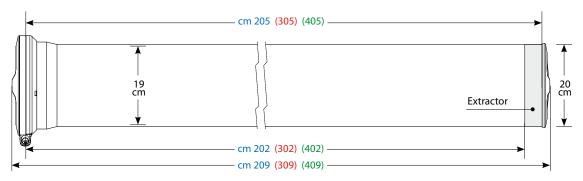





KARGO RACKSBlack powder coated steel frame with aluminium side profiles.
Suitable for installation on:

A) Foot kits directly

B) Rain gutter feet (needed 1 clamp set N99978 each 2 feet)

C) Kargo steel bars (needed 1 adaptor set N99979 each bar)

D) Kargo-Plus aluminium bars (needed 1 adaptor set N99979 each bar)

Box ☐ 1

Compact

		FIXPOINT	GRONDINA
N10102	L 140 x W 130 cm	114 cm	154 cm
N10105	L 170 x W 145 cm	129 cm	169 cm
N10107	L 190 x W 130 cm	114 cm	154 cm
N10108	L 190 x W 145 cm	129 cm	169 cm




TNIO	GRONDINA
4 cm	204 cm
9 cm	169 cm
1 cm	204 cm


Extended

	W	FIXPOINT	GRONDINA T
N10124	L 280 x W 180 cm	164 cm	204 cm
N10127	L 340 x W 145 cm	129 cm	169 cm
N10128	L 340 x W 180 cm	164 cm	204 cm
N10131	L 380 x W 180 cm	164 cm	204 cm





Direct mounting onto foot kits, any adaptor required



CLAMP SET FOR RAINGUTTER FOOT For installing roof rack onto raingutter foot (1 set each 2 feet)

N99978

Sacchetto / Bag 🗇 50






For installing roof racks onto Kargo / Kargo Plus bars (1 set each bar)



Box 🗇 4/12





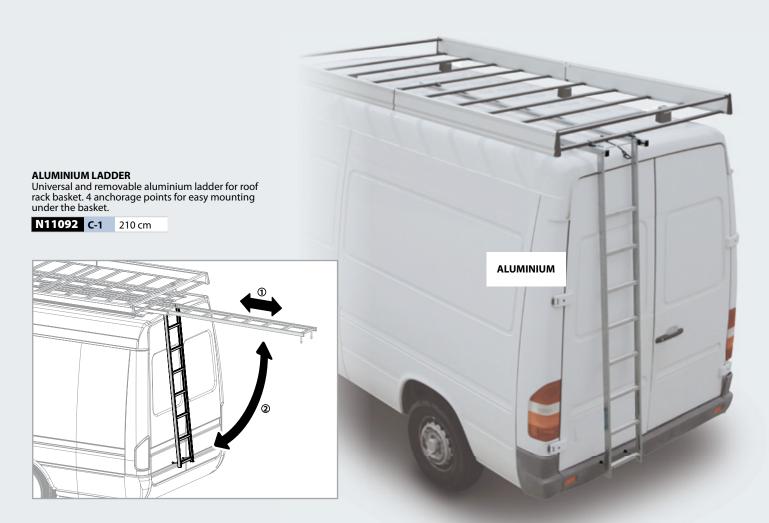








Box 🗇 4









LADDER STOPPER BELT U-5 (PAIR)

Practical and quick-to-use accessory for securing the transported ladder to the Kargo and Kargo-Plus bars.

The straps hold the steps, securing the ladder

to the bars. Warning: to be used only in combination with load stoppers.

N11065 U-5

Box 🗇 12





LADDER STEP ADAPTER U-6
Useful accessory for the securing of the ladder when the step is not properly aligned and consequently too far from the roof bar to be held by the stopper belt.
Warning to be used only in combination with

Warning: to be used only in combination with stopper belts (art. N11065)

N11067 U-6

Box 🗇 5/20













EYE-BOLTS KP-3 (PAIR)

Steel made, may be used in the top or side T-tracks. To be used for securing the load, in combination with ratchet tie down.

N11033 KP-3

Box 🗇 10 / 100





800 kg max




800 Kg Lashing capacity 2400 Kg Breaking strength

G3, FORGED CARGO D-RING ANCHOR, 2 PCS Material: A3 steel with zinc plated Lashing capacity: 800 kg Breaking strength: 2400 kg Easy to install

97702

D/Blister 🗇 10 / 50









180 Kg Lashing capacity 540 Kg Breaking strength

G4, FORGED CARGO D-RING ANCHOR, 2 PCS


- Material: A3 steel with zinc plated

- Material: As steel with the plated
 Lashing capacity: 180 kg
 Breaking strength: 540 kg
 Include: 4 screws M6x20 mm and 4 self blocking dices.
 Easy to install

97703

D/Blister 🗇 20 / 100











Special Auto Trading A/SBybjergvej, 13 - DK – 3060 Espergaerde
Denmark Phone: +45 49176060 - Telefax: +45 49176070 E-mail: satex@satex.dk www.satex.dk - www.nordrive.dk