


Central Article Code: D26075C51-A

Created: 16/06/2021

Local Code: EL754

Modified: 16/06/2021

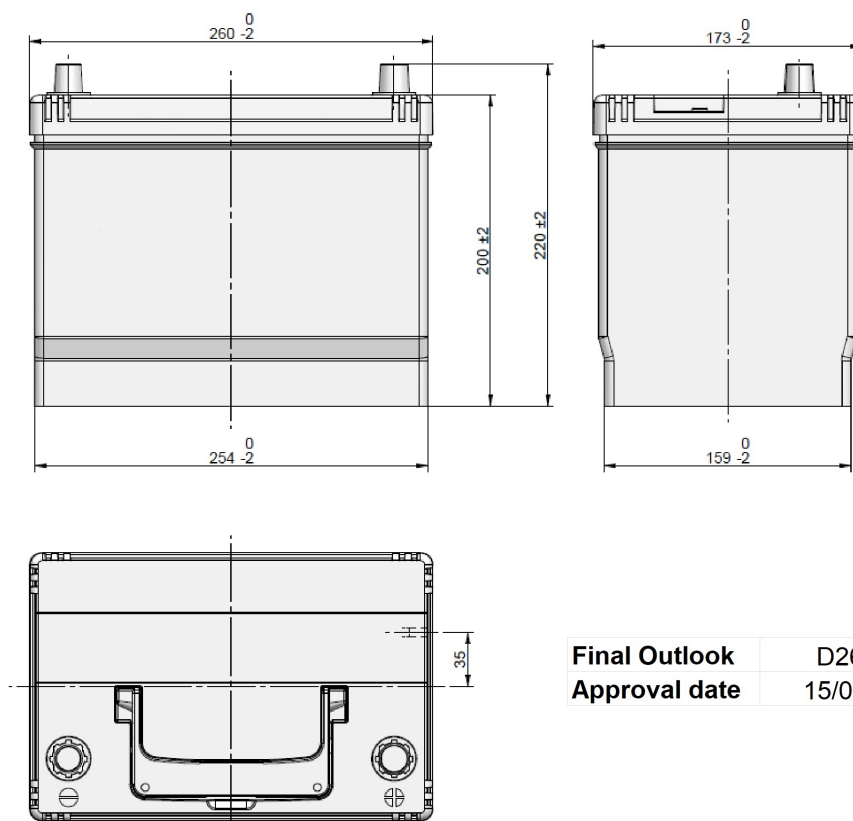

Final Outlook	D2651-A
Approval date	15/06/2021

PERFORMANCES

Voltage (V):	12 V
C20 (Ah):	75.0 20 h
Cranking (A):	750 EN
Charge:	WET
Technology:	Vented/Flooded
Grid:	Ca/Ca
Vibration:	V1 (30Hz+/-2Hz/3g/2h)
Endurance:	E2 (150c@50%) ref.EN-2015

STD. DIMENSIONS

Length (mm ± 2):	270
Width (mm ± 2):	173
Height (mm ± 2):	222
Total Weight (kg ± 5%):	19.00

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type:	D26	BLACK
Hold Down:	B0	
H.D. Adapter:	No	

COVER

Type:	Flat/Press integrated	BLACK
Polarity:	ETN 0	
Terminals:	EN taper post	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Central	
Filter:	1 Filter at Right	
Lateral Plug:	No	

PLUGS

Type:	1 x VCL Vent	BLACK
-------	--------------	-------

HANDLES

Type:	1 x Integrated	BLACK
-------	----------------	-------

OTHERS

Degassing Tube:	No
-----------------	----