


Central Article Code: D05115C28-A

Created: 16/05/2012

ETN Code or Other:

Modified: 10/15/2012

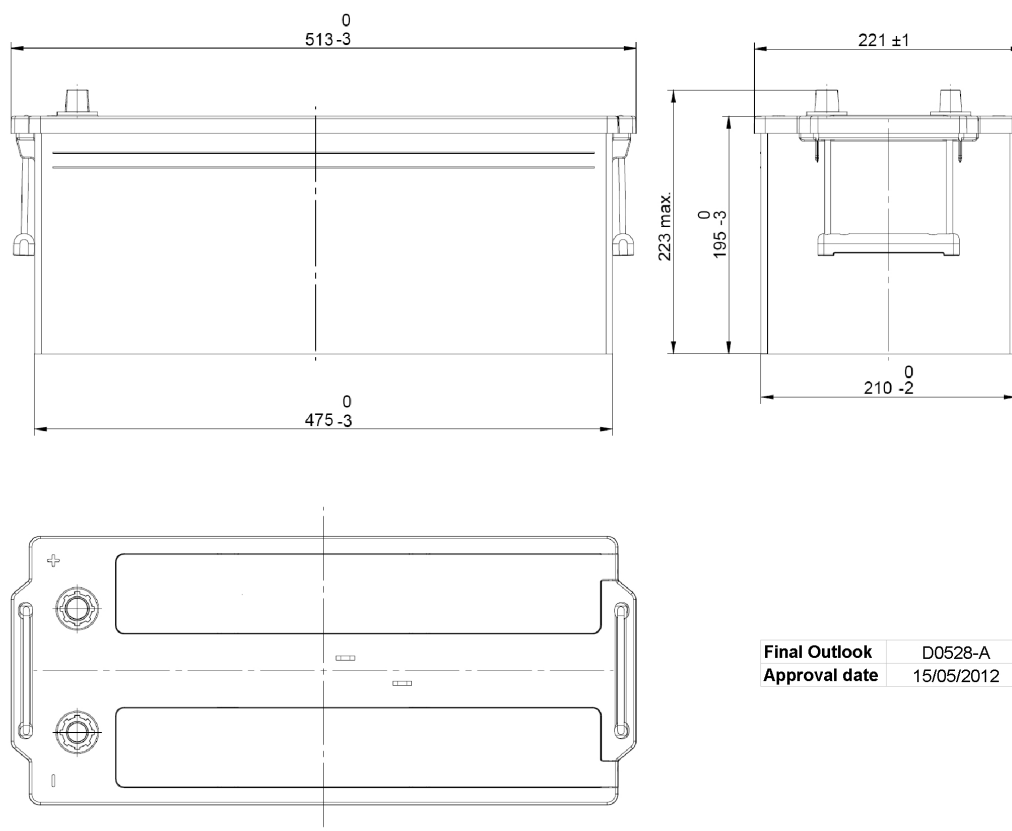

Final Outlook	D0528-A
Approval date	15/05/2012

PERFORMANCES

Voltage (V): 12 V
 C20 (Ah): 185.0 20 h
 Rc (min): 0
 Cranking (A): 1150 EN
 Vibration: V2+ (35Hz/6g/10h)
 Endurance: E3 (144 cycles@50%)
 Charge: WET
 Technology: Vented/Flooded
 Grid: Ca/Ca

WEIGHT AND STD. DIMENSIONS

Lead Weight (kg): 25.51
 Battery Weight (kg): 44.29
 Volume acid (l): 11.00
 Length (mm): 513
 Width (mm): 223
 Height (mm): 223

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type: D05 GREY MEDIUM
 Hold Down: B0
 H.D. Adapter: No

COVER

Type: Flat/Press GREY MEDIUM
 Polarity: ETN 3
 Terminals: EN taper post
 Terminal Adapter: No
 SOCI: No
 Ventilation: Central
 Filter: 2 Filters
 Lateral Plug: No

PLUGS

Type: 2 x VCL Vent GREY MEDIUM

HANDLES

Type: 2 x Rope (Rigid BLACK

OTHERS

Degassing Tube: No