


Central Article Code: L05086A37-A

ETN Code or Other: 0L580X1A

Created: 16/02/2011

Modified: 11/11/2013

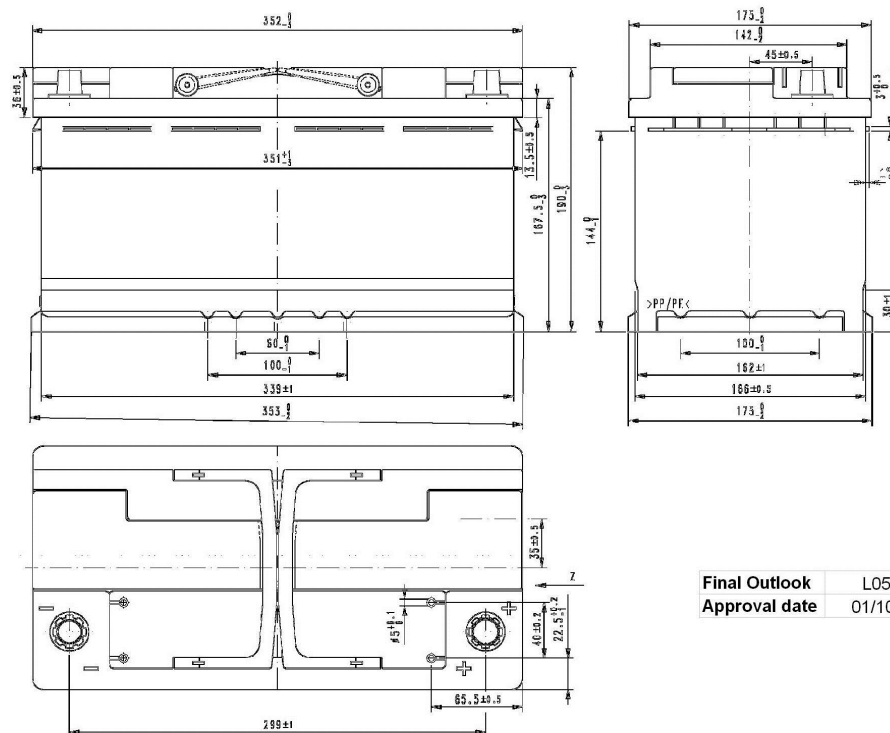

Final Outlook	L0537-A
Approval date	01/10/2005

PERFORMANCES

Voltage (V):	12 V
C20 (Ah):	95.0 20 h
Rc (min):	0
Cranking (A):	850 EN
Vibration:	Manufactured Specific
Endurance:	VDA Requirement
Charge:	CHARGED
Technology:	AGM
Grid:	Ca/Ca

WEIGHT AND STD. DIMENSIONS

Lead Weight (kg):	17.25
Battery Weight (kg):	26.00
Volume acid (l):	4.48
Length (mm):	353
Width (mm):	175
Height (mm):	190

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type:	L05	BLACK
Hold Down:	B13	
H.D. Adapter:	No	

COVER

Type:	Double with Integrated BLACK
Polarity:	ETN 0
Terminals:	EN taper post
Terminal Adapter:	No
SOCI:	No
Ventilation:	Central
Filter:	1 Filter Positive side
Lateral Plug:	No

PLUGS

Type:	1 x Vent Sealed	BLACK
-------	-----------------	-------

HANDLES

Type:	2 x Integrated	BLACK
-------	----------------	-------

OTHERS

Degassing Tube:	No
-----------------	----